

TECHNICAL SHEET




Plus perimeter belt is the edge insulation, which absorbs floor expansions and acts as thermo-acoustic insulation for the walls. Thickness 5 mm, height 150 mm. Packaging: 50 m roll.


Code

1071250

DIMENSIONS

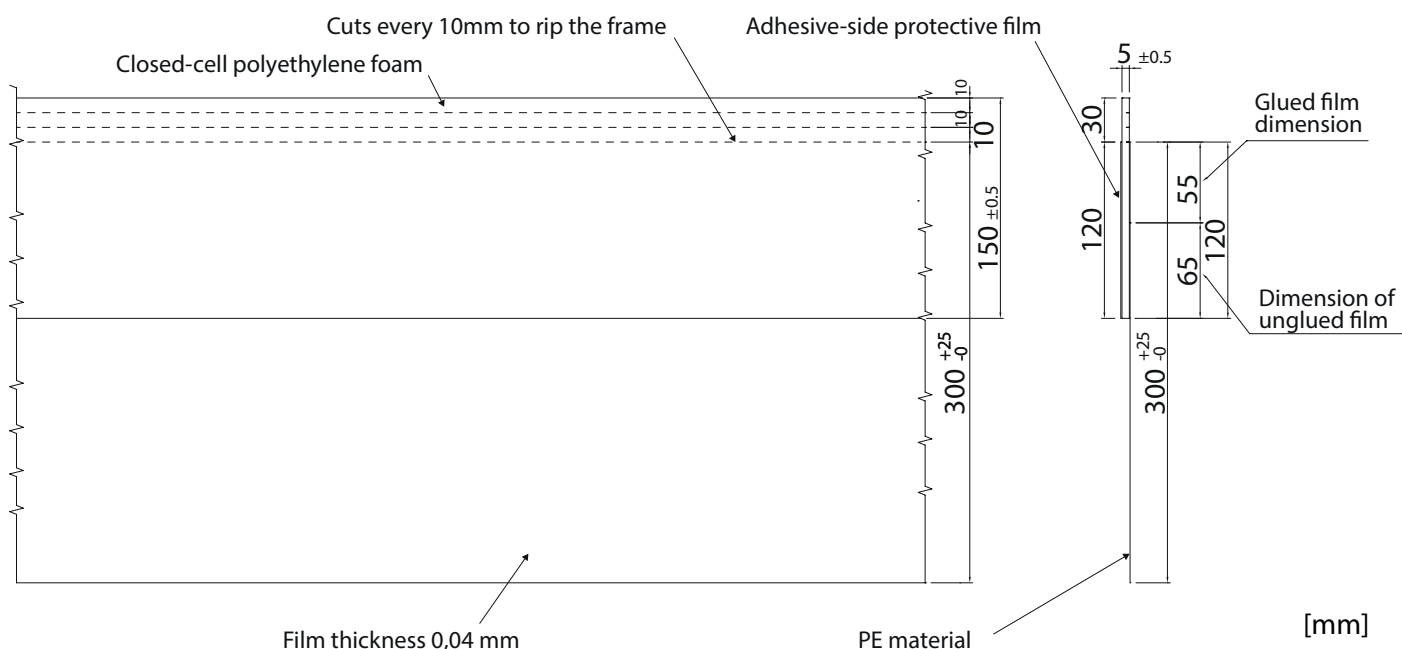

TECHNICAL CHARACTERISTICS

Feature	Value	Unit
Density	30 ÷ 33	kg/m ³
Thermal conductivity coefficient	0,035 a 10 °C 0,039 a 40 °C	W/(m · K)
Maximum temperatures of use	-20 ÷ +80	°C
Impact insulation in accordance with UNI EN ISO 10140-3, based on certificates and laboratory tests carried out	25,5	ΔLw (dB)
Compressive stress at 10 % deformation according to UNI EN 826, based on certificates and laboratory tests carried out	13,002	kPa
Toxicity According to AFNOR NF F 16-101-1988	Test report on CSI toxicity and smoke opacity nr. DC01/494F05 of 07/07/05	
Dynamic stiffness	43,0	MN/m ³

